


Ver 03 - PALCLS 31.08.21

# COLOUR-LOCK

## HIGH PERFORMANCE SILICONE SEALANT

- HIGHLY FLEXIBLE 100% SILICONE
- MOULD RESISTANT & SUITABLE FOR BOTH INTERIOR AND EXTERIOR APPLICATION
- SUITABLE FOR USE AROUND NATURAL STONE
- WIDE RANGE OF COLOURS WHICH MATCH WITH GROUT
- IDEAL FOR ALL JOINTS IN TILED KITCHENS AND BATHROOMS

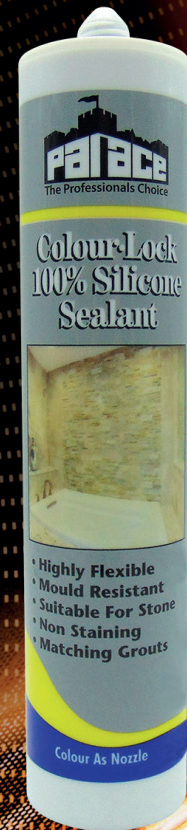

### TECHNICAL SUMMARY

UNIT SIZE	295ml
MOVEMENT FACTOR	+ / - 25%
ELONGATION	< 300%
DENSITY	0.95 - 0.98
SERVICE TEMP	+5°C up to 50°C
SKINNING TIME	20 g/ml < 30 mins
FULL CURE TIME	1 - 4 days (#)

\* Complies with the requirements of EN 15651  
Types: 1, F-EXT-INC-CC 25LM, 2, G-CC 25LM, 3, S-XS2

### PALACE COLOUR LOCK SILICONE

Is a flexible, one component, waterproof sanitary silicone sealant. This highly versatile premium product is designed for completing perimeter joints around ceramic & stone tiles, adjoining all types of sanitary ware and glazing systems. Can be used in both interior and exterior applications, demonstrating excellent adhesion to the widest range of building materials.

EXCELLENT ADHESION

CO-ORDINATES WITH EQUIVALENT GROUT SHADE

# COLOUR-LOCK

## High Performance Silicone Sealant



### DESCRIPTION

**PALACE COLOUR-LOCK SILICONE SEALANT** is a truly versatile, high performance one component flexible & waterproof sanitary silicone sealant for completing movement & perimeter joints around ceramic & stone tiles adjoining all types of sanitary ware and glazing systems. **PALACE COLOUR-LOCK SILICONE SEALANT** is resistant to mould growth, suitable for both interior and exterior applications and demonstrates excellent adhesion to the widest range of building materials, including natural stone tiles where its unique low odour "non-acetoxo" curing system prevents any staining to adjoining porous ceramic & stone tiled finishes. **PALACE COLOUR-LOCK SILICONE SEALANT** provides the perfect accompaniment to **PALACE COLOUR-LOCK SILICONE SEALANT** as each colour is matched to co-ordinate with the equivalent grout shade, ensuring that ALL joints in the completed bathroom or kitchen area can achieve a matching colour-fast finish.

### SURFACE PREPARATION

Ensure all joint areas, voids and contact surfaces are dry, clean and free from dirt, grease, adhesive residues and loose surface coatings. Providing adjoining surfaces are clean, priming is generally not required however very highly porous surfaces may require sealing with the use of a single coat of neat TILER'S PRIMER. Joint should be designed so that ideally the depth of the joint is no greater than the width and joint depth should be no less than 5mm for joints up to 10mm wide. Joints above 10mm in width should be half that in depth.

### APPLICATION METHOD

Use a sharp knife to cut off the tip of the cartridge, whilst leaving sufficient thread in place to engage with the nozzle. Cut the nozzle tip at a 45° angle and at a point to give the required joint width (usually about 6mm). Fit the cartridge into a suitably sized skeleton gun and slowly, but consistently extrude the sealant into the joint, whilst at the same time drawing the cartridge along the line of the joint to ensure even placement. In deep bed applications such as movement joints (> 10mm), it is advisable to insert a PU foam backer strip to control joint depth adhesion to the background substrate.

**PALACE COLOUR-LOCK SILICONE SEALANT** can be smoothed into the joint within 5 minutes of application using a lightly dampened pallet knife, or similar tool to give a blemish-free even surface. **PALACE COLOUR-LOCK SILICONE SEALANT** has a tack-free time of about 8 minutes and will start to form a skin after about 30 to 40 minutes

and depending on joint depth and site conditions will take about 24 hours to achieve complete cure through the joint (typically at a rate of 3mm / 24 hours).

### COVERAGE

**PALACE COLOUR-LOCK SILICONE SEALANT** will seal linear joints up to the following length (shown in metres), when consideration is given to both the width and depth of the joint to be filled. In deep movement joints use PU backer foam strips to maximise sealant output:

COVERAGE TABLE						
# CURE THRU TIME IS ABOUT 3MM EVERY 24 HOURS	JOINT WIDTH IN mm					
	6	12	15	20	25	
JOINT DEPTH IN mm	3	17	8.5	6.8	5.1	4.1
	6	9	4.5	3.6	2.7	2.2
	8	6.6	3.3	2.6	2.0	1.6
	10	5.2	2.6	2.1	1.6	1.3
	12	4.4	2.2	1.7	1.3	1.1

The coverage rates shown in the above table are for guidance purpose only and do not take into full consideration the effects of site conditions and wastage when the joint face is cleaned and smoothed.

### STORAGE AND PACKAGING

**PALACE COLOUR-LOCK SILICONE SEALANT** is supplied in standard cartridges (12 per case) and has a storage life of not less than 3 years if kept in dry, un-opened conditions.

TECHNICAL SUMMARY	
UNIT SIZE	295ml
MOVEMENT FACTOR	+ / - 25%
ELONGATION	< 300%
DENSITY	0.95 - 0.98
SERVICE TEMP	+5°C up to 50°C
SKINNING TIME	< 30 mins
FULL CURE TIME	1 - 4 days (#)

Complies with the requirements of EN 15651

Types: 1, F-EXT-INC-CC 25LM, 2, G-CC 25LM, 3, S-XS2

### HEALTH AND SAFETY

A complete PALACE material safety data sheet is available on request or online at [www.palacechemicals.co.uk](http://www.palacechemicals.co.uk)



EN ISO 14001



EMS 85788

EN ISO 9001



FM 01010

EN ISO 18001



OHS 596309

**PALACE CHEMICALS LTD**

SPEKE HALL INDUSTRIAL ESTATE

SPEKE LIVERPOOL L24 1YA

TEL: 0151 486 6101 - FAX: 0151 448 1982

E-MAIL: SALES@PALACECHEMICALS.CO.UK

# COLOUR-LOCK

## High Performance Silicone Sealant



### QUALITY AND ENVIRONMENT

All Palace Chemicals products are manufactured under a BSI accredited ISO 9001:2015 Quality Management System, along with an ISO 14001 Environmental Management system continually working to reduce our carbon footprint.

### TECHNICAL ADVISORY SERVICE

Should more specific technical information be required, contact the Palace Technical helpline on: **0151 486 6101**.

For a Technical Specification and quantity requirements, visit our 'TilingSpecifier' on the Palace website at: <http://www.palacechemicals.co.uk>

### DISCLAIMER

The information provided by this Technical data sheet is given in good faith and is to the best of our current knowledge true and accurate, however it is given without guarantee, as conditions of use and workmanship involved are both beyond our control. All information supplied is subject to the company's terms and conditions of sale, copies of which are available on request.

### COLOURS AVAILABLE

